

Precision Water Baths



Exceptional performance and reliability
for laboratory applications

Value, Performance and Reliability

Thermo Electron's Precision Water Baths provide exceptional performance and reliability for your laboratory applications. With a 50-year history of providing quality and value, the Precision name is trusted by the world's leading scientists for their clinical and research needs. Available in a variety of models and capacities, all Precision Water Baths can be equipped with a broad range of accessories to support your specific application requirements.




Applications

	General Purpose	Circulating		Shaking		Steaming
	Models 180 and 280 Series	Models 260, 265, 270	Coliform	Models 25 & 50	Dubnoff and Shallow Form	4-Hole and 8-Hole
Bacteriological Examinations	■	■	■	■	■	
Coagulation Tests	■	■		■		
Coliform Determinations		■	■	■		
Copper Strip Corrosion Tests	■	■			■	■
Crude Oil Studies	■	■				
Cytochemistry	■	■			■	
Dialysis					■	
Demulsibility Studies	■	■				
Enzyme Studies		■			■	
Electrophoresis Gel Destaining				■		
Environmental Studies	■	■	■	■	■	
Food Processing QC	■	■	■	■		
Genetic Studies	■	■		■	■	
Hormone Studies	■	■		■	■	
Immunological Research	■	■		■	■	
Incubation for Microbiological Assays	■	■	■	■		
Incubation for Microcentrifugation Tubes	■				■	
Melting Agar	■					■
Metallurgical Analysis	■	■		■	■	■
Molecular Biology	■	■		■	■	
Protein Analysis	■	■				
Radioactive Isotope Uptake Studies	■	■		■	■	
Radiochemistry	■	■		■		
Serological Research	■	■		■	■	
Thawing	■	■		■	■	
Thawing Blood	■	■		■	■	
Thawing Cryopreservation Vials	■				■	
Tissue Culture Research	■	■		■	■	
Virology Research	■	■		■	■	
Warming Reagents	■	■				
Water Quality Research	■	■	■	■	■	

Precision Dubnoff Reciprocal Shaking Baths

Features

- Dubnoff baths equipped with gassing hoods: 1 large and 2 small
- Microprocessor control with digital LED display and shaker control
- Adjustable shaking speed from 30 to 200 OPM
- Push-button convenience for entry of temperature and shaking speed
- Over-temperature protection capability
- Automatic motor shut-down capability
- One-piece, easy-to-remove tray for easy use and maintenance
- Free stainless-steel gable cover included
- Meets ASTM Method E 715 Class IIA standards
- UL listed (120 V)
- CE marked (230V)
- Optional O₂/N₂/CO₂ flowmeter
- Free Duck!

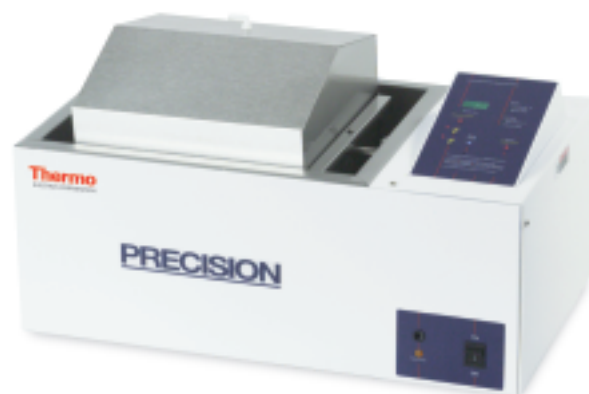

Precision Dubnoff Shaking Bath with large gassing hood

Precision's Dubnoff Reciprocal Shaking Baths are designed specifically for applications that require your samples to be incubated in a controlled atmosphere. This bath has a capacity of 14.5 liters (3.9 gallons), and has a depth of 3.5 inches (8.9 cm). One large and two small gassing hoods are included with each bath along with the gable cover. An optional 3-gas (oxygen, nitrogen, and CO₂) flowmeter is available for precise control of the atmosphere surrounding your important samples.

Specifications

Models	Dubnoff Metabolic Shaking Bath
Chamber Capacity ¹	3.9 gallons (14.5 liters)
Maximum Temperature ²	99.9°C
Temperature Uniformity at 37°C	±0.05°C
Temperature Sensitivity	±0.05°C
Oscillation per Minute	30 to 200
Stroke Length	0.5 to 1.5 in. (1.3 to 3.8 cm)
Dimensions (L x W x H)	
Chamber	12 x 15 x 7.5 in. (30.5 x 38.1 x 19 cm)
Removable Tray	11.5 x 11 x 6.5 in. (29.2 x 27.9 x 16.5 cm)
Exterior	14 x 24.5 x 9.5 in. (35.6 x 62.2 x 24.1 cm)
Electrical Specs (50/60Hz)	
120V	1000 Watts 8.2 Amps
230V	1000 Watts 4.3 Amps
BTU Output	3415
Shipping Data	
Dimensions	17 x 28.5 x 16.5 in. (53.3 x 72.4 x 41.9 cm)
Weight	55 lbs. (24.9 kg)
Volume	5.1 cu. ft. (0.14 cu. meters)
Catalog Number	
120V (UL listed)	51221076
230V ³ (CE marked)	51221077

1. Filled 3.5" (89 mm) from top of chamber

2. With gable cover

3. 50/60 Hz (Includes European style 50 Hz power cord; standard 220V 60 Hz power cord available separately. Part number 34400001)

See water bath accessories on back cover.

For more information, please contact us:

ExpotechUSA

10700 Rockley Road

Houston, TX -77099

USA

Phone: 281.496.0900

Fax: 281-496-0400

E-mail: sales@ExpotechUSA.com

Website: www.ExpotechUSA.com